
NATURAL GAS GENERATOR SET · MWM POWERED

DAF-NG-MW-1840

DAF POWER natural gas generator set rated 1840 kW / 1840 kVA, powered by the MWM TCG 3020 V16 gas engine. Clean-burning natural gas for distributed energy, cogeneration and continuous industrial power.

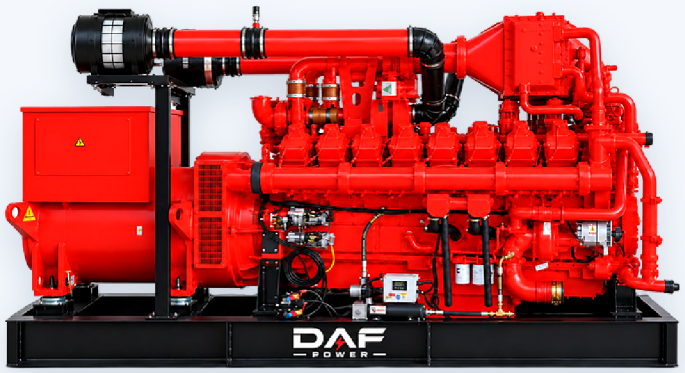

RATED OUTPUT	RATED POWER	RATING	FREQUENCY
1840 kVA	1840 kW	COP	50 Hz

TECHNICAL SPECIFICATIONS

Model No.	DAF-NG-MW-1840
Fuel type	Natural Gas
Frequency	50 Hz
Rated power	1840 kW / 1840 kVA
Rating	COP per ISO 8528-1
Engine brand	MWM
Engine model	TCG 3020 V16
Cylinders	V16

PRP = Prime Rated Power, COP = Continuous Operating Power, per ISO 8528-1. Engine model may vary between 50 Hz and 60 Hz configurations as shown. Final technical data are subject to the model technical drawing — please request the current version before ordering.

KEY FEATURES

- Lean-burn gas engine for low emissions and fuel economy
- Power range 38–2300 kVA covering prime and continuous duty
- PRP / COP ratings per ISO 8528-1
- 50 / 60 Hz configurations available
- OEM / ODM configuration available
- Global service and spare parts support

TYPICAL APPLICATIONS

- Distributed energy and CHP plants
- Data centers and industrial parks
- Oilfield associated gas utilization
- Commercial and municipal power
- Grid-support and peaking stations

WHY DAF POWER

- Generator set manufacturer since 2009
- ISO 9001 certified production
- 100% load-tested before shipment
- OEM / ODM configuration available
- Export support to 100+ countries

DAF (FUZHOU) POWER TECHNOLOGY CO., LTD
ADD: No.76, Gongye Road, Luojiang District, Ningde City, Fujian Province, China
www.dafpowers.com